




Drainage Pipe 12m 2/3 perforated
extruded+drilled PE 100 black

Size	Code	Detail	Weight	da(OD) mm	s mm	L3 mm
110	25.730.0110.17	110X6,6 SDR17 ISO S-8	2.190	110	6,6	51
125	25.730.0125.17	125X7,4 SDR17 ISO S-8	2.790	125	7,4	62
140	25.730.0140.17	140X8,3 SDR17 ISO S-8	3.500	140	8,3	61
160	25.730.0160.17	160X9,5 SDR17 ISO S-8	4.570	160	9,5	61
180	25.730.0180.17	180X10,7 SDR17 ISO S-8	5.770	180	10,7	78
200	25.730.0200.17	200X11,9 SDR17 ISO S-8	7.120	200	11,9	69
225	25.730.0225.17	225X13,4 SDR17 ISO S-8	9.030	225	13,4	65
250	25.730.0250.17	250X14,8 SDR17 ISO S-8	11.100	250	14,8	58
280	25.730.0280.17	280X16,6 SDR17 ISO S-8	13.900	280	16,6	52
315	25.730.0315.17	315X18,7 SDR17 ISO S-8	17.600	315	18,7	72
355	25.730.0355.17	355X21,1 SDR17 ISO S-8	22.400	355	21,1	64
63	25.730.0063.11	63X5,8 SDR11 ISO S-5	1.060	63	5,8	52
75	25.730.0075.11	75X6,8 SDR11 ISO S-5	1.480	75	6,8	67
90	25.730.0090.11	90X8,2 SDR11 ISO S-5	2.140	90	8,2	63
110	25.730.0110.11	110X10,0 SDR11 ISO S-5	3.180	110	10	51
125	25.730.0125.11	125X11,4 SDR11 ISO S-5	4.120	125	11,4	62
140	25.730.0140.11	140X12,7 SDR11 ISO S-5	5.130	140	12,7	61
160	25.730.0160.11	160X14,6 SDR11 ISO S-5	6.740	160	14,6	61
180	25.730.0180.11	180X16,4 SDR11 ISO S-5	8.510	180	16,4	78

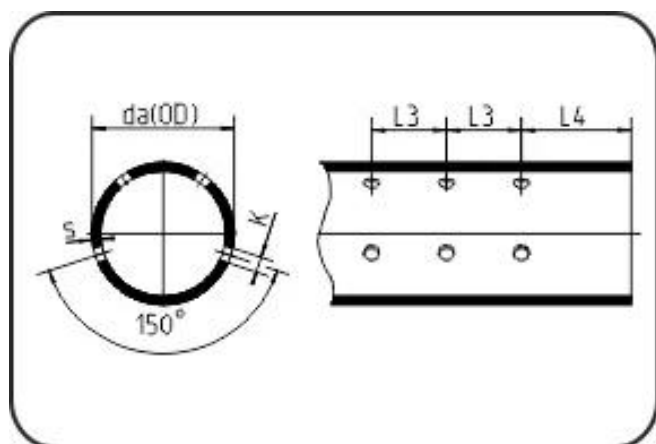

Size	Code	Detail	Weight	da(OD) mm	s mm	L3 mm
200	25.730.0200.11	200X18,2 SDR11 ISO S-5	10.500	200	18,2	69
225	25.730.0225.11	225X20,5 SDR11 ISO S-5	13.300	225	20,5	65
250	25.730.0250.11	250X22,7 SDR11 ISO S-5	16.300	250	22,7	58
280	25.730.0280.11	280X25,4 SDR11 ISO S-5	20.500	280	25,4	52
315	25.730.0315.11	315X28,6 SDR11 ISO S-5	25.900	315	28,6	72
355	25.730.0355.11	355X32,2 SDR11 ISO S-5	32.900	355	32,2	64
63	25.730.0063.07	63X8,6 SDR7,4 ISO S-3,2	1.490	63	8,6	52
75	25.730.0075.07	75X10,3 SDR7,4 ISO S-3,2	2.120	75	10,3	67
90	25.730.0090.07	90X12,3 SDR7,4 ISO S-3,2	3.030	90	12,3	63
110	25.730.0110.07	110X15,1 SDR7,4 ISO S-3,2	4.540	110	15,1	51
125	25.730.0125.07	125X17,1 SDR7,4 ISO S-3,2	5.840	125	17,1	62
140	25.730.0140.07	140X19,2 SDR7,4 ISO S-3,2	7.330	140	19,2	61
160	25.730.0160.07	160X21,9 SDR7,4 ISO S-3,2	9.540	160	21,9	61
180	25.730.0180.07	180X24,6 SDR7,4 ISO S-3,2	12.100	180	24,6	78
200	25.730.0200.07	200X27,4 SDR7,4 ISO S-3,2	14.900	200	27,4	69
225	25.730.0225.07	225X30,8 SDR7,4 ISO S-3,2	18.800	225	30,8	65
250	25.730.0250.07	250X34,2 SDR7,4 ISO S-3,2	23.300	250	34,2	58
280	25.730.0280.07	280X38,3 SDR7,4 ISO S-3,2	29.200	280	38,3	52
315	25.730.0315.07	315X43,1 SDR7,4 ISO S-3,2	36.900	315	43,1	72
355	25.730.0355.07	355X48,5 SDR7,4 ISO S-3,2	46.800	355	48,5	64