




Redüktör konsantrik uzun musluk
enjeksiyon kalıplı Alın + E-füzyon kaynağı
PPR gri

Boyut	Kod	Detay	Ağırlık	da(OD) mm	da1(OD1) mm	s mm	s1 mm	L mm	L1 mm	L2 mm
25/20	11.067.2520.11	25/20 SDR11 ISO S-5	0.012	25	20	2,3	1,9	88	41,5	41,5
32/20	11.067.3220.11	32/20 SDR11 ISO S-5	0.019	32	20	2,9	1,9	92	45,5	40
32/25	11.067.3225.11	32/25 SDR11 ISO S-5	0.020	32	25	2,9	2,3	92	44	41
40/20	11.067.4020.11	40/20 SDR11 ISO S-5	0.028	40	20	3,7	1,9	102	50,5	39
40/25	11.067.4025.11	40/25 SDR11 ISO S-5	0.030	40	25	3,7	2,3	102	50,5	40,5
40/32	11.067.4032.11	40/32 SDR11 ISO S-5	0.035	40	32	3,7	2,9	104	51	45
50/25	11.067.5025.11	50/25 SDR11 ISO S-5	0.051	50	25	4,6	2,3	118	57	44
50/32	11.067.5032.11	50/32 SDR11 ISO S-5	0.060	50	32	4,6	2,9	122	59	46

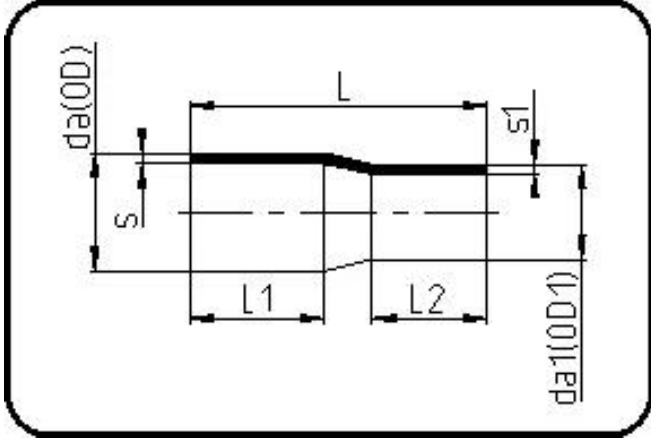

Boyut	Kod	Detay	Ağırlık	da(OD) mm	da1(OD1) mm	s mm	s1 mm	L mm	L1 mm	L2 mm
50/40	11.067.5040.11	50/40 SDR11 ISO S-5	0.068	50	40	4,6	3,7	126	57	50
63/25	11.067.6325.11	63/25 SDR11 ISO S-5	0.090	63	25	5,8	2,3	138	65	44
63/32	11.067.6332.11	63/32 SDR11 ISO S-5	0.093	63	32	5,8	2,9	136	64	49
63/40	11.067.6340.11	63/40 SDR11 ISO S-5	0.099	63	40	5,8	3,7	128	59	50
63/50	11.067.6350.11	63/50 SDR11 ISO S-5	0.124	63	50	5,8	4,6	150	64,5	59
75/50	11.067.7550.11	75/50 SDR11 ISO S-5	0.159	75	50	6,8	4,6	148	64	58
75/63	11.067.7563.11	75/63 SDR11 ISO S-5	0.183	75	63	6,8	5,8	149	65	64
90/63	11.067.9063.11	90/63 SDR11 ISO S-5	0.152	90	63	8,2	5,8	157	72	60
90/75	11.067.9075.11	90/75 SDR11 ISO S-5	0.282	90	75	8,2	6,8	163	75	63
110/63	11.067.1163.11	110/63 SDR11 ISO S-5	0.405	110	63	10	5,8	180	83	63
110/90	11.067.1190.11	110/90 SDR11 ISO S-5	0.490	110	90	10	8,2	180	83	75
125/63	11.067.1263.11	125/63 SDR11 ISO S-5	0.532	125	63	11,4	5,8	187	87	61



Boyut	Kod	Detay	Ağırlık	da(OD) mm	da1(OD1) mm	s mm	s1 mm	L mm	L1 mm	L2 mm
125/90	11.067.1290.11	125/90 SDR11 ISO S-5	0.610	125	90	11,4	8,2	190	92	75
125/110	11.067.1211.11	125/110 SDR11 ISO S-5	0.697	125	110	11,4	10	200	89	82
140/125	11.067.1412.11	140/125 SDR11 ISO S-5	0.910	140	125	12,7	11,4	215	95	95
160/90	11.067.1690.11	160/90 SDR11 ISO S-5	0.990	160	90	14,6	8,2	220	99	85
160/110	11.067.1611.11	160/110 SDR11 ISO S-5	1.070	160	110	14,6	10	220	99	88
160/125	11.067.1612.11	160/125 SDR11 ISO S-5	1.160	160	125	14,6	11,4	228	98	92
160/140	11.067.1614.11	160/140 SDR11 ISO S-5	1.300	160	140	14,6	12,7	229	101	96
180/125	11.067.1812.11	180/125 SDR11 ISO S-5	1.547	180	125	16,4	11,4	247	112	96
180/160	11.067.1816.11	180/160 SDR11 ISO S-5	1.730	180	160	16,4	14,6	245	110	108
200/160	11.067.2016.11	200/160 SDR11 ISO S-5	2.140	200	160	18,2	14,6	252	112	102
225/160	11.067.2216.11	225/160 SDR11 ISO S-5	2.765	225	160	20,5	14,6	270	128	101
250/160	11.067.2516.11	250/160 SDR11 ISO S-5	3.750	250	160	22,7	14,6	317	155	113



Boyut	Kod	Detay	Ağırlık	da(OD) mm	da1(OD1) mm	s mm	s1 mm	L mm	L1 mm	L2 mm
250/200	11.067.2521.11	250/200 SDR11 ISO S-5	4.200	250	200	22,7	18,2	314	155	125
250/225	11.067.2522.11	250/225 SDR11 ISO S-5	4.540	250	225	22,7	20,5	315	153	133
280/250	11.067.2825.11	280/250 SDR11 ISO S-5	6.220	280	250	25,4	22,7	355	165	155
315/200	11.067.3120.11	315/200 SDR11 ISO S-5	7.120	315	200	28,6	18,2	380	180	134
315/250	11.067.3125.11	315/250 SDR11 ISO S-5	7.760	315	250	28,6	22,7	375	174	158