




Stub Flange DIN short spigot injection
 molded Butt + IR + HPF-welding PVDF
 natural

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	L mm	L3 mm	d3 mm	d4 mm	h mm
90	30.012.0090.33	90X2,8 SDR33 ISO S-16	0.367	90	2,8	80	42	105	138	11
110	30.012.0110.33	110X3,4 SDR33 ISO S-16	0.457	110	3,4	80	42	125	158	12
125	30.012.0125.33	125X3,9 SDR33 ISO S-16	0.444	125	3,9	80	33	132	158	14
140	30.012.0140.33	140X4,3 SDR33 ISO S-16	0.663	140	4,3	80	41	155	188	15
160	30.012.0160.33	160X4,9 SDR33 ISO S-16	0.937	160	4,9	81	37	175	212	16
180	30.012.0180.33	180X5,5 SDR33 ISO S-16	0.850	180	5,5	80	57	183	212	18
200	30.012.0200.33	200X6,2 SDR33 ISO S-16	1.870	200	6,2	98	42	232	268	18
225	30.012.0225.33	225X6,9 SDR33 ISO S-16	1.450	225	6,9	100	76	235	268	18

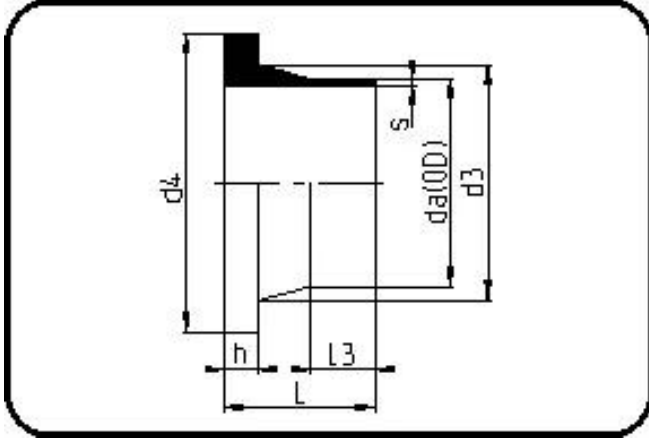

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	L mm	L3 mm	d3 mm	d4 mm	h mm
250	30.012.0250.33	250X7,7 SDR33 ISO S-16	2.740	250	7,7	100	40	285	320	20
280	30.012.0280.33	280X8,6 SDR33 ISO S-16	2.109	280	8,6	100	50	288	320	20
315	30.012.0315.33	315X9,7 SDR33 ISO S-16	2.150	315	9,7	100	44	335	370	20
20	30.012.0020.21	20X1,9 SDR21 ISO S-10	0.029	20	1,9	49	31	27	45	6
25	30.012.0025.21	25X1,9 SDR21 ISO S-10	0.044	25	1,9	50	30	33	58	6,5
32	30.012.0032.21	32X2,4 SDR21 ISO S-10	0.066	32	2,4	50	26	40	68	7
40	30.012.0040.21	40X2,4 SDR21 ISO S-10	0.093	40	2,4	50	24	50	78	8
50	30.012.0050.21	50X3,0 SDR21 ISO S-10	0.126	50	3	50	22	61	88	9
63	30.012.0063.21	63X3,0 SDR21 ISO S-10	0.178	63	3	50	19,5	76	102	10
75	30.012.0075.21	75X3,6 SDR21 ISO S-10	0.242	75	3,6	50	20	89	122	10
90	30.012.0090.21	90X4,3 SDR21 ISO S-10	0.409	90	4,3	80	42	105	138	11
110	30.012.0110.21	110X5,3 SDR21 ISO S-10	0.537	110	5,3	80	40	125	158	12



Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	L mm	L3 mm	d3 mm	d4 mm	h mm
125	30.012.0125.21	125X6,0 SDR21 ISO S-10	0.622	125	6	80	42	132	158	14
140	30.012.0140.21	140X6,7 SDR21 ISO S-10	0.810	140	6,7	80	42	155	188	15
160	30.012.0160.21	160X7,7 SDR21 ISO S-10	1.074	160	7,7	81	36,5	175	212	16
180	30.012.0180.21	180X8,6 SDR21 ISO S-10	1.040	180	8,6	80	57	183	212	18
200	30.012.0200.21	200X9,6 SDR21 ISO S-10	2.260	200	9,6	98	43	232	268	20
225	30.012.0225.21	225X10,8 SDR21 ISO S-10	1.964	225	10,8	100	76	235	268	20
250	30.012.0250.21	250X11,9 SDR21 ISO S-10	3.570	250	11,9	97	39	285	320	22
280	30.012.0280.21	280X13,4 SDR21 ISO S-10	2.976	280	13,4	100	72	288	320	25