




5,8 m Boru Ekstrüde PE 100 siyah

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm
1600	25.758.1600.41	1600X39,2 SDR41 ISO S-20	194.000	1.600	39,2
1800	25.758.1800.41	1800X44 SDR41 ISO S-20	245.000	1.800	44
2000	25.758.2000.41	2000X48,9 SDR41 ISO S-20	302.000	2.000	48,9
2250	25.758.2250.41	2250X55 SDR41 ISO S-20	382.000	2.250	55
1600	25.758.1600.33	1600X49 SDR33 ISO S-16	241.000	1.600	49
1800	25.758.1800.33	1800X55,1 SDR33 ISO S-16	305.000	1.800	55,1
2000	25.758.2000.33	2000X61,2 SDR33 ISO S-16	376.000	2.000	61,2
2250	25.758.2250.33	2250X68,9 SDR33 ISO S-16	476.000	2.250	70
2500	25.758.2500.33	2500X76,5 SDR33 ISO S-16	587.000	2.500	77,7
1600	25.758.1600.26	1600X61,2 SDR26 ISO S-12,5	298.000	1.600	61,2
1800	25.758.1800.26	1800X68,8 SDR26 ISO S-12,5	377.000	1.800	68,8
2000	25.758.2000.26	2000X76,4 SDR26 ISO S-12,5	465.000	2.000	76,4
2250	25.758.2250.26	2250X86 SDR26 ISO S-12,5	589.000	2.250	86
2500	25.758.2500.26	2500X95,5 SDR26 ISO S-12,5	727.000	2.500	95,6
1600	25.758.1600.17	1600X94,8 SDR17 ISO S-8	451.000	1.600	94,8
1800	25.758.1800.17	1800X106,6 SDR17 ISO S-8	583.000	1.800	106,6
2000	25.758.2000.17	2000X118,4 SDR17 ISO S-8	720.000	2.000	118,4
2250	25.758.2250.17	2250X133,3 SDR17 ISO S-8	910.000	2.250	133,3
2500	25.758.2500.17	2500X148,1 SDR17 ISO S-8	1,124.000	2.500	148,1

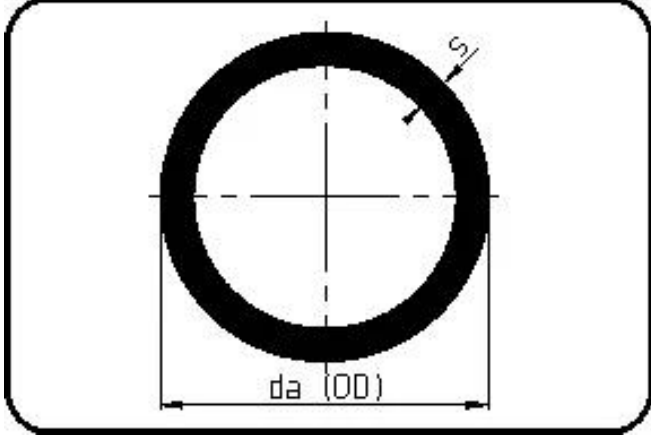

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm
1600	25.758.1600.11	1600X145,2 SDR11 ISO S-5	680.000	1.600	145,2