




11° Bükme Boru 1,5 x Dış Çap yarıçapı
 borudan şekillendirilmiş Alın Kaynak + E-
 füzyon kaynağı PE 100-RC siyah

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	r mm	z mm	L mm
90	70.394.0090.09	90 SDR9 ISO S-4 20 bar	1.700	90	10,1	135	210	150
110	70.394.0110.09	110 SDR9 ISO S-4 20 bar	2.480	110	12,3	165	330	150
125	70.394.0125.09	125 SDR9 ISO S-4 20 bar	4.060	125	14	188	240	150
140	70.394.0140.09	140 SDR9 ISO S-4 20 bar	4.750	140	15,7	210	250	150
160	70.394.0160.09	160 SDR9 ISO S-4 20 bar	6.650	160	17,9	240	415	150
180	70.394.0180.09	180 SDR9 ISO S-4 20 bar	8.990	180	20,1	270	280	150
200	70.394.0200.09	200 SDR9 ISO S-4 20 bar	12.200	200	22,4	300	290	150
225	70.394.0225.09	225 SDR9 ISO S-4 20 bar	16.000	225	25,2	338	510	150
250	70.394.0250.09	250 SDR9 ISO S-4 20 bar	21.190	250	27,9	375	410	250
280	70.394.0280.09	280 SDR9 ISO S-4 20 bar	26.640	280	31,3	420	420	250
315	70.394.0315.09	315 SDR9 ISO S-4 20 bar	39.000	315	35,2	473	700	450

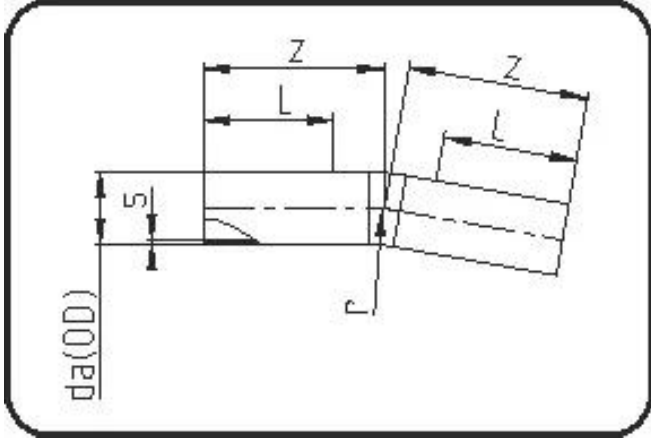

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	r mm	z mm	L mm
355	70.394.0355.09	355 SDR9 ISO S-4 20 bar	55.300	355	39,7	560	500	300
400	70.394.0400.09	400 SDR9 ISO S-4 20 bar	66.200	400	44,7	637	520	300
450	70.394.0450.09	450 SDR9 ISO S-4 20 bar	83.960	450	50,3	711	550	300
500	70.394.0500.09	500 SDR9 ISO S-4 20 bar	117.000	500	55,8	783	570	350
560	70.394.0560.09	560 SDR9 ISO S-4 20 bar	150.000	560	62,5	877	600	350
630	70.394.0630.09	630 SDR9 ISO S-4 20 bar	200.000	630	70,3	955	850	350