




Tee kısa musluk enjeksiyon kalıplı Alt kaynak + IR kaynak PP Saf gri

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	z mm	L mm	L3 mm
20	72.006.0020.11	20X1,9 SDR11 ISO S-5	0.012	20	1,9	34	68	17,5
25	72.006.0025.11	25X2,3 SDR11 ISO S-5	0.020	25	2,3	40	80	20,5
32	72.006.0032.11	32X2,9 SDR11 ISO S-5	0.038	32	2,9	45	90	20,5
40	72.006.0040.11	40X3,7 SDR11 ISO S-5	0.062	40	3,7	50	100	20,5
50	72.006.0050.11	50X4,6 SDR11 ISO S-5	0.112	50	4,6	60	120	23
63	72.006.0063.11	63X5,8 SDR11 ISO S-5	0.223	63	5,8	72	144	25
75	72.006.0075.11	75X6,8 SDR11 ISO S-5	0.392	75	6,8	75	152	15
90	72.006.0090.11	90X8,2 SDR11 ISO S-5	0.668	90	8,2	105	213	38
110	72.006.0110.11	110X10,0 SDR11 ISO S-5	1.199	110	10	122	253	51
125	72.006.0125.11	125X11,4 SDR11 ISO S-5	1.700	125	11,4	140	280	52
140	72.006.0140.11	140X12,7 SDR11 ISO S-5	2.397	140	12,7	152	305	53

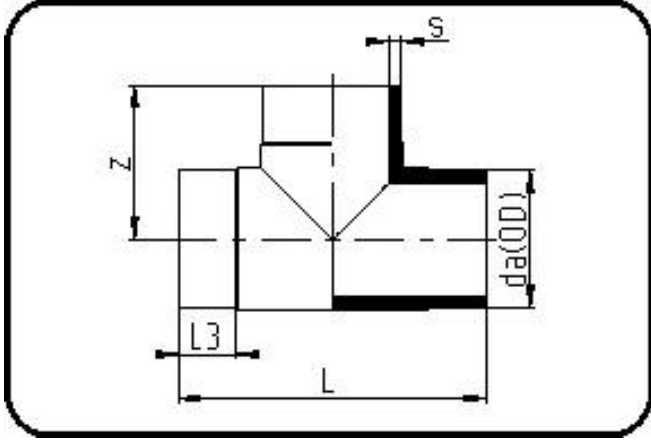

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	z mm	L mm	L3 mm
160	72.006.0160.11	160X14,6 SDR11 ISO S-5	3.251	160	14,6	173	346	57
180	72.006.0180.11	180X16,4 SDR11 ISO S-5	4.361	180	16,4	186	372	57
200	72.006.0200.11	200X18,2 SDR11 ISO S-5	6.020	200	18,2	200	405	57
225	72.006.0225.11	225X20,5 SDR11 ISO S-5	8.257	225	20,5	222,5	445	57
250	72.006.0250.11	250X22,7 SDR11 ISO S-5	10.960	250	22,7	235	470	72
280	72.006.0280.11	280X25,4 SDR11 ISO S-5	15.600	280	25,4	270	540	80
315	72.006.0315.11	315X28,6 SDR11 ISO S-5	19.200	315	28,6	275	550	80