




İnegal Tee kısa musluk enjeksiyon kalıplı
 Alın kaynağı + IR kaynağı PP Saf gri

Boyut	Kod	Detay	Ağırlık	da(OD) mm	da1(OD1) mm	s mm	s1 mm	z mm	L mm	L1 mm	L2 mm
90/32	72.016.9032.11	90/32 SDR11 ISO S-5	0.567	90	32	8,2	2,9	85	213	57	23
90/50	72.016.9050.11	90/50 SDR11 ISO S-5	0.572	90	50	8,2	4,6	90	213	57	27
110/32	72.016.1132.11	110/32 SDR11 ISO S-5	0.907	110	32	10	2,9	94	244	70	23
110/50	72.016.1150.11	110/50 SDR11 ISO S-5	0.944	110	50	10	4,6	103	244	70	27
125/63	72.016.1263.11	125/63 SDR11 ISO S-5	1.377	125	63	11,4	5,8	112	280	76	31
140/63	72.016.1463.11	140/63 SDR11 ISO S-5	1.777	140	63	12,7	5,8	120	302	87	32
140/75	72.016.1475.11	140/75 SDR11 ISO S-5	1.926	140	75	12,7	6,8	130	305	54	35
140/90	72.016.1490.11	140/90 SDR11 ISO S-5	1.831	140	90	12,7	8,2	130	305	88	42
140/110	72.016.1411.11	140/110 SDR11 ISO S-5	2.180	140	110	12,7	10	141	305	54	47

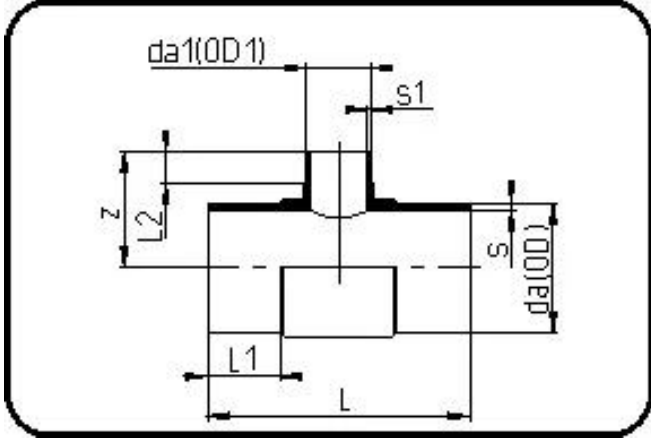

Boyut	Kod	Detay	Ağırlık	da(OD) mm	da1(OD1) mm	s mm	s1 mm	z mm	L mm	L1 mm	L2 mm
160/125	72.016.1612.11	160/125 SDR11 ISO S-5	2.780	160	125	14,6	11,4	158	335	62	52
180/63	72.016.1863.11	180/63 SDR11 ISO S-5	3.057	180	63	16,4	5,8	134	367	130	32
180/75	72.016.1875.11	180/75 SDR11 ISO S-5	3.020	180	75	16,4	6,8	148	366	123	31
180/125	72.016.1812.11	180/125 SDR11 ISO S-5	3.240	180	125	16,4	11,4	166	366	100	52
225/125	72.016.2212.11	225/125 SDR11 ISO S-5	6.120	225	125	20,5	11,4	178	456	143	40