




90° dirsek uzun musluk enjeksiyon kalıplama Alın ve kızılötesi kaynak PP Saf gri

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	r mm	z mm	L3 mm
20	72.068.0020.11	20X1,9 SDR11 ISO S-5	0.014	20	1,9	20	60	40
25	72.068.0025.11	25X2,3 SDR11 ISO S-5	0.023	25	2,3	25	68,5	42,5
32	72.068.0032.11	32X2,9 SDR11 ISO S-5	0.051	32	2,9	32	79	47
40	72.068.0040.11	40X3,7 SDR11 ISO S-5	0.074	40	3,7	40	92,5	52
50	72.068.0050.11	50X4,6 SDR11 ISO S-5	0.125	50	4,6	50	108,5	58,5
63	72.068.0063.11	63X5,8 SDR11 ISO S-5	0.252	63	5,8	63	129,5	66,5
75	72.068.0075.11	75X6,8 SDR11 ISO S-5	0.403	75	6,8	75	150	75
90	72.068.0090.11	90X8,2 SDR11 ISO S-5	0.634	90	8,2	90	168	76
110	72.068.0110.11	110X10,0 SDR11 ISO S-5	1.104	110	10	110	192	82
125	72.068.0125.11	125X11,4 SDR11 ISO S-5	1.644	125	11,4	125	218	92
140	72.068.0140.11	140X12,7 SDR11 ISO S-5	2.211	140	12,7	140	241	100

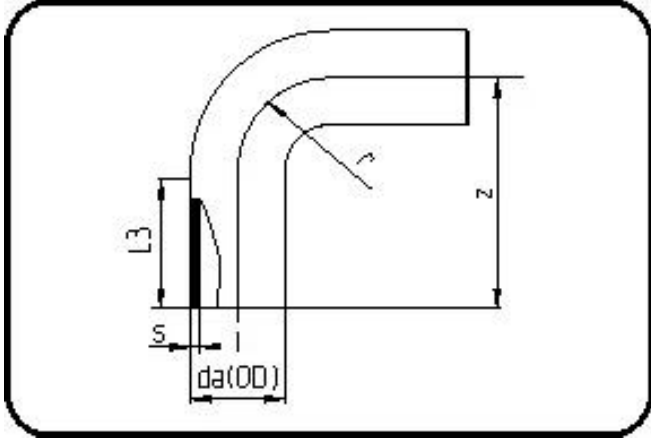

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	r mm	z mm	L3 mm
160	72.068.0160.11	160X14,6 SDR11 ISO S-5	3.195	160	14,6	160	261,5	100,5
180	72.068.0180.11	180X16,4 SDR11 ISO S-5	4.310	180	16,4	180	290,5	109
200	72.068.0200.11	200X18,2 SDR11 ISO S-5	5.828	200	18,2	200	318,5	118,5
225	72.068.0225.11	225X20,5 SDR11 ISO S-5	8.060	225	20,5	225	353	125
250	72.068.0250.11	250X22,7 SDR11 ISO S-5	10.432	250	22,7	250	389	135
280	72.068.0280.11	280X25,4 SDR11 ISO S-5	13.600	280	25,4	280	429	146
315	72.068.0315.11	315X28,6 SDR11 ISO S-5	19.200	315	28,6	315	475	158