


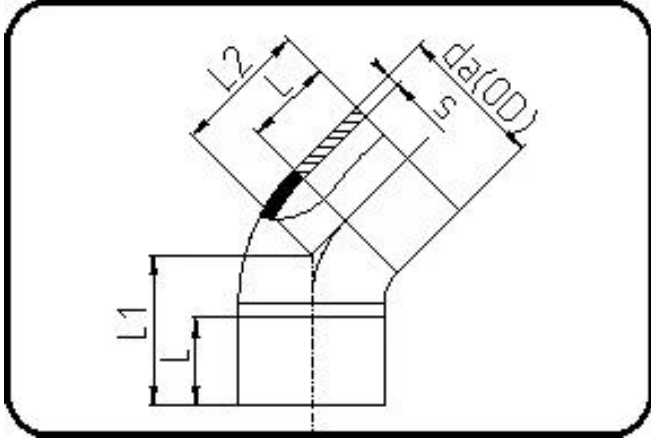

45° Dirsek Her iki taraftan 100 mm
uzatılmış Enjeksiyon kalıplama + kaynak
Alın kaynak + IR kaynak PVDF UHP doğal

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	L mm	L1 mm	L2 mm
125	35.001.2125.33	125X3,9 SDR33 ISO S-16	0.695	125	3,9	100	162	152
180	35.001.2180.33	180X5,5 SDR33 ISO S-16	2.150	180	5,5	100	197	172
200	35.001.2200.33	200X6,2 SDR33 ISO S-16	2.820	200	6,2	100	202	181
225	35.001.2225.33	225X6,9 SDR33 ISO S-16	3.760	225	6,9	100	211	193
250	35.001.2250.33	250X7,7 SDR33 ISO S-16	5.118	250	7,7	100	241	204
280	35.001.2280.33	280X8,6 SDR33 ISO S-16	6.277	280	8,6	100	224	216
315	35.001.2315.33	315X9,7 SDR33 ISO S-16	8.917	315	9,7	100	262	224
125	35.001.2125.21	125X6 SDR21 ISO S-10	1.358	125	6	100	162	152
180	35.001.2180.21	180X8,6 SDR21 ISO S-10	3.277	180	8,6	100	197	172
200	35.001.2200.21	200X9,6 SDR21 ISO S-10	4.050	200	9,6	100	202	181
280	35.001.2280.21	280X13,4 SDR21 ISO S-10	9.260	280	13,4	100	224	216