




Dirsek 90° uzun musluk enjeksiyon kalıplama Alın ve IR kaynak PVDF UHP doğal

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	r mm	z mm	L3 mm
90	35.068.0090.33	90X2,8 SDR33 ISO S-16	0.396	90	2,8	90	123	34
110	35.068.0110.33	110X3,4 SDR33 ISO S-16	0.660	110	3,4	110	142	34
125	35.068.0125.33	125X3,9 SDR33 ISO S-16	0.910	125	3,9	125	159	34
140	35.068.0140.33	140X4,3 SDR33 ISO S-16	1.422	140	4,3	140	216	75
160	35.068.0160.33	160X4,9 SDR33 ISO S-16	1.983	160	4,9	160	236	75
225	35.068.0225.33	225X6,9 SDR33 ISO S-16	5.190	225	6,9	225	301	75
20	35.068.0020.21	20X1,9 SDR21 ISO S-10	0.026	20	1,9	20	51	32
25	35.068.0025.21	25X1,9 SDR21 ISO S-10	0.029	25	1,9	25	56	33
32	35.068.0032.21	32X2,4 SDR21 ISO S-10	0.052	32	2,4	32	63	33
40	35.068.0040.21	40X2,4 SDR21 ISO S-10	0.073	40	2,4	40	73	36
50	35.068.0050.21	50X3,0 SDR21 ISO S-10	0.123	50	3	50	84	36

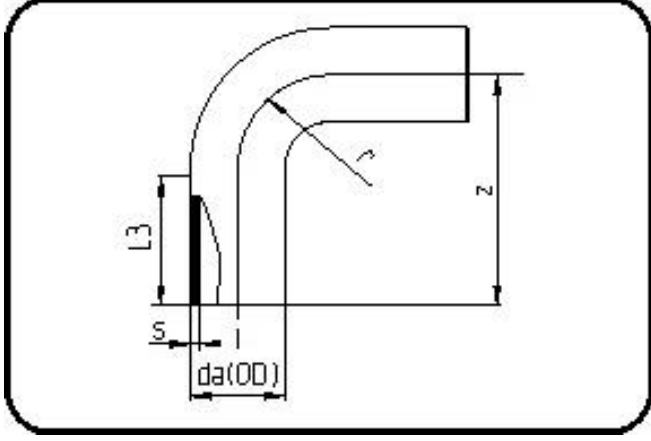

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm	r mm	z mm	L3 mm
63	35.068.0063.21	63X3,0 SDR21 ISO S-10	0.199	63	3	63	97	38
75	35.068.0075.21	75X3,6 SDR21 ISO S-10	0.306	75	3,6	75	100	28
90	35.068.0090.21	90X4,3 SDR21 ISO S-10	0.525	90	4,3	90	123	34
110	35.068.0110.21	110X5,3 SDR21 ISO S-10	0.912	110	5,3	110	142	34
125	35.068.0125.21	125X6,0 SDR21 ISO S-10	1.287	125	6	125	159	34
140	35.068.0140.21	140X6,7 SDR21 ISO S-10	2.002	140	6,7	140	216	75
160	35.068.0160.21	160X7,7 SDR21 ISO S-10	2.840	160	7,7	160	236	75
225	35.068.0225.21	225X10,8 SDR21 ISO S-10	7.315	225	10,8	225	301	75