




E-Adaptör Soketi pirinç erkek dişli W/P-TW
enjeksiyon kalıplı Elektrofüzyon PE 100-
RC siyah

Boyut	Kod	Detay	Ağırlık	da(OD) mm	L mm	L1 mm	d mm	d1 mm	d2 mm
20 X 1/2	70.185.2020.11	20X1/2" SDR 11 PN16	0.136	20	120	45	30	34	12
25 X 3/4	70.185.2525.11	25X3/4" SDR 11 PN16	0.175	25	127	46	35	37	16
32 X 1/2	70.185.2032.11	32X1/2" SDR 11 PN16	0.255	32	132	43	42	43	12
32 X 3/4	70.185.2532.11	32X3/4" SDR 11 PN16	0.243	32	133	44	42	43	16
32 X 1	70.185.3232.11	32X1" SDR 11 PN16	0.238	32	138	49	42	40	21
32 X 1 1/4	70.185.4032.11	32X1 1/4" SDR 11 PN16	0.370	32	138	49	42	43	21
32 X 1 1/2	70.185.5032.11	32X1 1/2" SDR 11 PN16	0.545	32	140	51	42	43	21
40 X 1	70.185.3240.11	40X1" SDR 17-11 PN16	0.387	40	147	48	53	47	21
40 X 1 1/4	70.185.4040.11	40X1 1/4" SDR 17-11 PN16	0.370	40	151	52	53	44	27,5
40 X 1 1/2	70.185.5040.11	40X1 1/2" SDR 17-11 PN16	0.500	40	151	52	53	47	28
40 X 2	70.185.6340.11	40X2" SDR 17-11 PN16	0.851	40	155	56	53	47	28

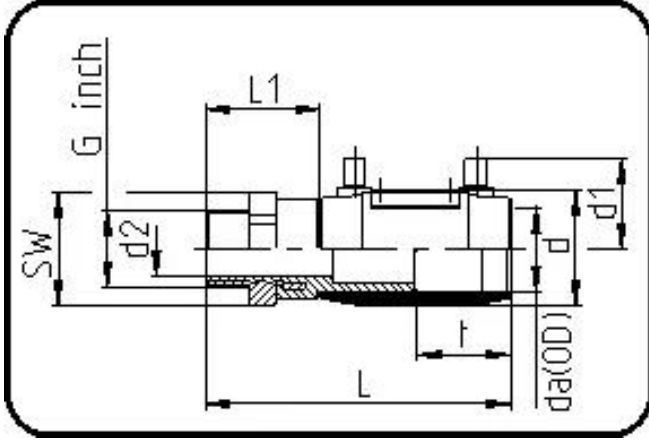

Boyut	Kod	Detay	Ağırlık	da(OD) mm	L mm	L1 mm	d mm	d1 mm	d2 mm
50 X 1	70.185.3250.11	50X1" SDR 17-11 PN16	0.599	50	159	48	67	53	21
50 X 1 1/4	70.185.4050.11	50X1 1/4" SDR 17-11 PN16	0.570	50	162	51	67	53	28
50 X 1 1/2	70.185.5050.11	50X1 1/2" SDR 17-11 PN16	0.529	50	166	55	67	49	33,5
50 X 2	70.185.6350.11	50X2" SDR 17-11 PN16	0.827	50	168	57	67	53	34
63 X 1 1/4	70.185.4063.11	63X1 1/4" SDR 17-11 PN16	0.900	63	179	52	83	60	28
63 X 1 1/2	70.185.5063.11	63X1 1/2" SDR 17-11 PN16	0.830	63	183	56	83	60	34
63 X 2	70.185.6363.11	63X2" SDR 17-11 PN16	0.825	63	189	62	83	56	42