




5 metrelik boru ekstrüde edilmiş PVDF
UHP doğal

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm
90	35.705.0090.33	90X2,8 SDR33 ISO S-16	1.480	90	2,8
110	35.705.0110.33	110X3,4 SDR33 ISO S-16	2.200	110	3,4
125	35.705.0125.33	125X3,9 SDR33 ISO S-16	2.840	125	3,9
140	35.705.0140.33	140X4,3 SDR33 ISO S-16	3.520	140	4,3
160	35.705.0160.33	160X4,9 SDR33 ISO S-16	4.540	160	4,9
180	35.705.0180.33	180X5,5 SDR33 ISO S-16	5.740	180	5,5
200	35.705.0200.33	200X6,2 SDR33 ISO S-16	7.190	200	6,2
225	35.705.0225.33	225X6,9 SDR33 ISO S-16	8.950	225	6,9
250	35.705.0250.33	250X7,7 SDR33 ISO S-16	11.090	250	7,7
280	35.705.0280.33	280X8,6 SDR33 ISO S-16	13.860	280	8,6
315	35.705.0315.33	315X9,7 SDR33 ISO S-16	17.550	315	9,7
20	35.705.0020.21	20X1,9 SDR21 ISO S-10	0.210	20	1,9
25	35.705.0025.21	25X1,9 SDR21 ISO S-10	0.270	25	1,9
32	35.705.0032.21	32X2,4 SDR21 ISO S-10	0.440	32	2,4
40	35.705.0040.21	40X2,4 SDR21 ISO S-10	0.550	40	2,4
50	35.705.0050.21	50X3,0 SDR21 ISO S-10	0.850	50	3
63	35.705.0063.21	63X3,0 SDR21 ISO S-10	1.090	63	3
75	35.705.0075.21	75X3,6 SDR21 ISO S-10	1.550	75	3,6
90	35.705.0090.21	90X4,3 SDR21 ISO S-10	2.220	90	4,3

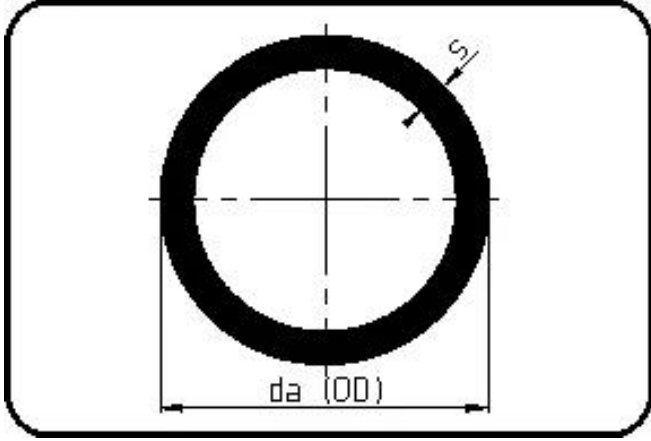

Boyut	Kod	Detay	Ağırlık	da(OD) mm	s mm
110	35.705.0110.21	110X5,3 SDR21 ISO S-10	3.320	110	5,3
125	35.705.0125.21	125X6,0 SDR21 ISO S-10	4.240	125	6
140	35.705.0140.21	140X6,7 SDR21 ISO S-10	5.310	140	6,7
160	35.705.0160.21	160X7,7 SDR21 ISO S-10	6.960	160	7,7
180	35.705.0180.21	180X8,6 SDR21 ISO S-10	8.740	180	8,6
200	35.705.0200.21	200X9,6 SDR21 ISO S-10	10.740	200	9,6
225	35.705.0225.21	225X10,8 SDR21 ISO S-10	13.670	225	10,8
250	35.705.0250.21	250X11,9 SDR21 ISO S-10	16.730	250	11,9
280	35.705.0280.21	280X13,4 SDR21 ISO S-10	21.110	280	13,4
315	35.705.0315.21	315X15,0 SDR21 ISO S-10	26.500	315	15